

UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)

ASSISTANT COMMISSIONER FOR PATENTS

U.S. PATENT APPLICATION

Washington D.C. 20231

Case Docket No.: P-081

Transmitted herewith for filing is the patent application of

INVENTOR OR APPLICATION IDENTIFIER: Sung-Bae JUN

Re: METHOD OF DESCRIBING MULTIPLE LEVEL DIGEST SEGMENT INFORMATION SCHEME FOR MULTIMEDIA CONTENTS AND APPARATUS FOR GENERATING DIGEST STREAM FROM DESCRIBED MULTIPLE LEVEL DIGEST SEGMENT INFORMATION SCHEME AND METHOD THEREOF

Enclosed are:

- | | |
|--|--|
| <p>1. [X] <u>24</u> pages of specification, claims, abstract</p> <p>2. [X] <u>5</u> sheets of FORMAL drawing.</p> <p>3. [X] <u>2</u> pages of newly executed Declaration & Power of Attorney (original).</p> <p>4. [X] Priority Claimed.</p> <p>5. [] Small Entity Statement.</p> <p>6. [] Information Disclosure Statement, Form PTO-1449 and reference.</p> <p>10. [X] Authorization under 37 C.F.R. §1.136(a)(3).</p> <p>11. [] Other:</p> | <p>7. [X] Assignment Papers for <u>LG Electronics Inc.</u> (cover sheet, assignment & assignment fee).</p> <p>8. [X] Certified copy of <u>Korean Patent Application No. 3015/1999, filed January 30, 1999</u>.</p> <p>9. [X] Two (2) return postcards.
[X] Stamp & Return with Courier.
[X] Prepaid Postcard-Stamped Filing Date & Returned with Unofficial Serial Number.</p> |
|--|--|

CLAIMS AS FILED

For	No. Filed	No. Extra	Rate	Fee
Total Claims	21	0	X \$18.00	\$18.00
Indep. Claims	4	0	X \$78.00	\$78.00
Multiple Dependent Claims (If applicable)			X \$260.00	\$0.00
BASIC FEE				\$690.00
TOTAL FILING FEE				\$786.00

- [] This is a Continuation-in-part (CIP) of prior application No: _____ filed _____. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- [] Amend the specification by inserting before the first line the sentence:
--This application is a continuation-in-part of Application Serial No. _____ filed _____.--
- [X] A check in the amount of \$786.00 (Check #8271) is attached.
- [] Please charge my Deposit Account No. 16-0607 in the amount of \$____. A duplicate copy of this sheet is enclosed.
- [X] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.
- [X] Any additional filing fees required under 37 C.F.R. 1.16.
- [X] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.
- [X] Any patent application processing fees under 37 C.F.R. 1.17.
- [X] Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM

Daniel Y. J. Kim
Registration No. 36,186

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440

Date: January 28, 2000

METHOD OF DESCRIBING MULTIPLE LEVEL DIGEST SEGMENT
INFORMATION SCHEME FOR MULTIMEDIA CONTENTS AND APPARATUS
FOR GENERATING DIGEST STREAM FROM DESCRIBED MULTIPLE LEVEL
DIGEST SEGMENT INFORMATION SCHEME AND METHOD THEREOF.

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a technique for describing a multiple level
digest segment information scheme for multimedia contents in a content-based
data area of a multimedia stream and method for generating a digest
streams(highlights) using the multiple level digest segment information scheme for
the purpose of providing a multiple levels of digest streams for a multimedia
stream.

15

2. Description of the Prior Art

A digest stream for a multimedia stream is provided for the purpose of
enabling users to understand the overall story and the structure of a multimedia
content or to find and move to desired position fast.

20

Multimedia server system such as a VOD(Video-on-Demand) server system,
a broadcast system, a karaoke, etc., can provide digest streams(highlights) for
multimedia contents (e.g., movie, drama, sports, etc.) to achieve above purposes.

25

A digest stream(highlight) of a multimedia stream is constructed by
arranging audio-visual segments, each of which is the essence of an original

stream in the development of the story. Here, the segment is a sequence of continuous frames. Since the digest stream is a sub stream of the multimedia stream, the size of the digest stream is much smaller than that of the original stream.

5 Therefore, a user who want to understand the overall structure and/or the story of a multimedia content prefers to access a digest stream rather than accessing the entire stream. The digest stream also can be used as a program guide for users who want to select a program from a multimedia database.

10 There are two types of summarization method for multimedia contents. The one is providing key frames or key regions and the other is providing digest streams(highlights) which is constructed by gathering and arranging important segments of an original stream

15 In the former method, since it is difficult for a user to understand the entire flow of the original stream and it is difficult to display too many key frames at a time, an additional operation such as a screen scrolling is required in order to understand the content of the stream only with the key frames, thereby causing an inconvenience.

20 In the latter method, generally, a content provider extracts a sub stream from the original stream, and stores it separately. In this case, an additional storage for storing the digest stream is required. In addition, the content provider edits only a certain time amount of the digest stream and provides it to the user. Accordingly, the user can access only a single level digest stream edited by the content provider. Therefore, users cannot obtain various digest streams of the
25 desired length. Suppose that a content provider provides only a 10 minute

highlight for a 2 hour video. Under that situation, users may want to access 5, 10, 20 minute digest streams respectively, depending upon their situation. In that case, a user who want 5 or 20 minute highlight for the given content can not browse the digest stream of their desire. Only 10 minute digest stream will be served
5 regardless of the user's request. Therefore, in order to satisfy user's various needs, the content provider has to edit and store multiple levels of digest streams for one multimedia stream. In this case, a large amount of storage is required to store multiple versions of digest streams, and accordingly, there occurs difficulty in managing each of the digest stream.

10 SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a multiple levels digest streams, thereby dynamically coping with the level of user's need
15 with respect to a digest stream.

It is another object of the present invention to provide multiple levels of digest streams with small amount of storage.

It is yet another object of the present invention to reduce the encoding time of a digest stream.

20 To achieve the above objects, there is provided a method of describing information about multiple levels of digest streams for multimedia contents in accordance with an embodiment of the present invention which includes the steps of: describing the level information of digest segments by multiple levels in the content-based data area of the multimedia content; describing the digest level
25 information of each digest segment and the time range information in a digest

segment information structure; and describing multi level digest segment information scheme with digest segment information structures.

To achieve the above objects, there is provided a method of describing information about multiple levels of digest streams for multimedia contents in

accordance with the second embodiment of the present invention which includes the steps of: describing the digest level information of digest segments to a digest

level header by multiple levels in the content-based data area of a multimedia stream; describing the time range information of each digest segment in a digest

segment information structure; and describing information about digest streams by

arranging the digest segment information structures of the same digest level. ;

describing multi level digest segment information scheme with digest level headers each of which has a list of digest segment information structures. In order to

achieve the above objects, there is provided a method of generating multiple levels of digest streams for multimedia contents in accordance with the present

invention which includes the steps of: detecting the digest level and time range information of each digest segment information structures from the multiple level

digest information scheme contained in the content-based data area of a multimedia stream; and, when a condition is queried by the user, generating a

multiple level digest stream by arranging the digest segments with a priority of

more than a certain level corresponding to the condition in a time sequence.

In addition, to achieve the above objects, there is provided an apparatus for generating multiple levels of digest streams for multimedia contents in accordance with the present invention which includes an user input unit; a digest stream level determining unit for determining a digest level of a digest stream corresponding to

the condition queried by the user input unit and outputting the same, upon receipt

of a multimedia stream signal; and a decoder for decoding the digest segments having the above digest level and outputting the same.

Additional advantages, objects and features of the invention will become more apparent from the description which follows.

5

BRIEF DESCRIPTION OF THE INVENTION.

The present invention will become more fully understood from the detailed description given herein below and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

Figure 1 shows an example of digest segments for a multimedia stream in accordance with an embodiment of the present invention;

Figure 2 shows the construction of a multiple level digest segment information scheme of a multimedia stream in accordance with an embodiment of the present invention;

Figure 3 shows the construction of a multiple level digest segment information scheme of a multimedia stream in accordance with another embodiment of the present invention;

Figure 4 shows an example of multiple level digest streams constructed by the multiple level digest segment information scheme;

Figure 5 is a graph showing the total running time of digest streams according to digest levels;

Figure 6 is a schematic block diagram of an apparatus for generating multiple levels of digest streams for multimedia contents in accordance with an

embodiment of the present invention;

Figure 7 is a schematic block diagram of an apparatus for generating multiple levels of digest streams for multimedia contents in accordance with another embodiment of the present invention;

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS.

In a content-based data area of a multimedia stream, generally, an appearance of an audio-visual object, occurrence information of each event, state information of audio-visual objects, events, backgrounds, scene information, shot information, segment information, etc. are described on a time axis. According to the present invention, the data structure of a multiple level digest segment information scheme for providing multiple levels of digest streams is described in the content-based data area thereof. The multiple level digest segment information scheme is constructed by a plurality of multiple level digest segment information structures, each of which is a data structure for describing digest segment in which a time range information of the digest segment is described and also a digest level information can be described. Moreover, in some cases, data for representing the running time of a digest stream or the total running time of digest segments of each digest level can be additionally described. A digest stream is comprised of digest segments. An importance level associated with each digest segment is used as a digest level for generating multiple levels of digest streams dynamically.

In addition, each digest segment information structure has a time range information of time continuous data, and the time range information can be represented by the start point and end point or the start point and duration of the

digest segment.

Meanwhile, a digest segment is different from a shot, a scene and the like. Taking example by drama, generally, a digest stream is not constructed by connecting shots or scenes. Because the whole content can be analogized by browsing only parts of a shot or a scene in most cases, a digest stream is generally constructed by connecting some parts of shots or scenes. In a field such as sports, digest stream does not use entire shot or entire scene in order to construct a digest stream for the reason of the characteristics thereof.

In some cases, the digest segment corresponds to a shot or a scene, but, in most cases, it does not necessarily correspond to any of them. Therefore, in the present invention, the multiple level digest segment information scheme for providing multiple levels of digest streams by assigning an importance level to each digest segment, rather than by assigning an importance level to a shot or a scene, is proposed. Here, the digest segment is defined as a sequence of continuous frames, which is a general idea of covering shots or segments.

The construction of a digest stream in accordance with the present invention will now be described with reference to Figures 1 through 5.

Figure 1 shows an example of digest segments for a multimedia stream in accordance with an embodiment of the present invention. As illustrated in Figure 1, the horizontal axis represents the time axis, and the vertical axis denotes the digest level axis. It is shown that an original stream, which is a multimedia stream, is divided into a plurality of digest segments, which are divided into a plurality of digest levels. In the present invention, it is assumed that a first digest level '0' is the highest in priority, and a n-th digest level 'n-1' is the lowest.

Figure 2 shows the construction of a multiple level digest segment

information scheme of a multimedia stream in accordance with an embodiment of the present invention. A portion illustrated by a square is a digest segment information structure, and a number illustrated within the square is an ID of a digest segment information structure, which is stated only for the convenience of explanation. Digest segment structures can be sequentially arranged in a time sequence, each of which has its digest level and time range information(start point and end point or start point and duration).

Figure 3 shows the construction of a multiple level digest segment information scheme for a multimedia stream different from that of Figure 2. Digest level headers(L_0, L_1, \dots, L_{n-1}) are divided according to digest levels, and assuming that the number of digest levels is n , the number of digest level headers is n . For each digest level header(L_0, L_1, \dots, L_{n-1}), digest segment information structures of the corresponding digest level are arranged. For convenience, the digest segment information structures can be arranged in a time sequence. For instance, a first digest level header(L_0) has digest segment information structures 5, 10, 30 and 138 arranged therein, and a second digest segment information structures 12, 22, 40, 50, 54, 70 and 88 arranged therein. In this manner, unlike the digest segment information structure in accordance with an embodiment of the present invention as shown in Figure 2, the digest segment information structure in accordance with another embodiment of the present invention as shown in Figure 3 has its time range information, and its digest level is described in its digest level header. Herein, information on the position of a first digest segment information structure among a plurality of digest segment information structures belonging to each digest level header may be needed. In this case, the information on the position can be contained in the digest level header or other area. Meanwhile, the

presentation as illustrated in Figure 2 and the presentation as illustrated in Figure 3 are easily convertible to each other.

The method of obtaining multiple levels of digest streams from a multiple level digest segment information scheme for a multimedia content thus described will be illustrated below.

It is assumed that the number of digest levels for the original stream is n , and the number of digest segments for the original stream is m as described above. S_j denotes the j -th digest segment information structure, $L(S_j)$ denotes the digest level of the digest segment information structure S_j , and H_i denotes the digest stream whose digest level is i . The digest stream can be represented by a sequence of digest segment information structures, so that when a set of digest segments of the digest stream(H_i) is denoted by $S(H_i)$, the set $S(H_i)$ is defined as follow:

$$S(H_i) = \{S_j \mid L(S_j) = 0, 1, 2, \dots, i, (j=0, 1, 2, \dots, m-1)\}$$

That is, each element of the set $S(H_i)$ is a digest segment information structure whose digest level is less than or equal to i . All the digest segment information structures contained in the set $S(H_i)$ can be sorted in a time sequence. According to the definition of the above set $S(H_i)$, the digest stream whose digest levels is $k+1(H_{k+1})$ includes the digest stream whose digest level is $k(H_k)$.

Taking example by Figure 3, the first digest stream(H_0) is constructed by arranging digest segment information structures($S5$, $S10$, $S30$ and $S138$) of digest level '0' in a time sequence, and the second digest stream(H_1) is constructed by arranging the digest segment information structures($S5$, $S10$, $S30$ and $S138$) of digest level '0' and digest segment information structures($S12$, $S22$, $S40$, $S50$, $S54$, $S70$ and $S88$) of digest level '1' in a time sequence. That is, the second

digest stream(H_i) is constructed by arranging digest segment information structures($S5, S10, S12, S22, S30, S40, S50, S54, S70, S88$ and $S138$) in a time sequence.

Figure 4 shows an example of multiple level digest streams constructed by the above-described method.

Next, the running time of each digest stream can be obtained based on the time range information contained in each of the plurality of digest segment information structures, which will be described below.

The total running time of the digest segment information structures belonging to a i -th digest level is the sum of the running time of each of digest segment information structures which belong to the i -th digest level.

That is, the running time $R(H_k)$ of the digest stream whose digest level is $k(H_k)$ can be represented by the sum of the running time of digest information structures whose digest level is less than or equal to k , can be expressed as follow.

$$R(H_k) = \sum_{i=0}^{i=k} R(Li)$$

Where $R(Li)$ denotes the sum of the running time of each digest segment information structure whose digest level is i .

Figure 5 is a graph showing the total running time of a digest streams according to digest levels. As illustrated therein, since the digest stream whose digest level is $k+1(H_{k+1})$ includes the digest stream whose digest level is $k(H_k)$, the running time $R(H_{k+1})$ of the digest stream(H_{k+1}) is longer than or equal to the

running time $R(H_k)$ of the digest stream (H_k) .

Next, the operation of providing a digest stream according to the query of the user will be described.

Figure 6 is a schematic block diagram of an apparatus for generating multiple levels of digest streams for a multimedia content in accordance with an embodiment of the present invention. In the apparatus as illustrated in Figure 6, when a plurality of running times is displayed, one of which is queried by the user, a digest stream corresponding to the queried running time is provided.

As illustrated in Figure 6, the apparatus in accordance with an embodiment of the present invention includes a digest stream level determining unit 1 for determining and outputting the level of a digest stream corresponding to the running time queried by the user, upon receipt of a multimedia stream signal; a user input unit 2 for outputting the running time queried by the user to the digest stream level determining unit 1 by the operation of the user; a decoder 3 for outputting digest segments having a digest level by decoding based on the digest level which is inputted from the digest stream level determining unit 1, upon receipt of a multimedia stream signal; and a browsing/recording/editing unit 4 for sequentially browsing, recording, and editing the outputted digest segments.

The operation of the apparatus in accordance with an embodiment of the present invention thus described will now be described. Meanwhile, the operation of browsing, recording and editing performed by the browsing/recording/editing unit 4 is carried out by a well-known technique of the conventional art, and accordingly a detailed description thereof is omitted.

The digest stream level determining unit 1 includes a digest segment information scheme analyzing unit 11 and a digest stream information display unit

12. A content provider or a media file supplies the digest stream level determining unit 1 with a stream signal, and the digest stream level determining unit 1 determines a digest level of a user-selected digest stream. Herein, the multimedia stream signal includes a stream data and a content-based data for the stream, and the content-based data of the stream includes related multiple level digest segment information scheme.

The multiple level digest segment information scheme analyzing unit 11 computes the running time of each digest stream by analyzing the multiple level digest segment information scheme. The digest stream information display unit 12 displays the running time by computed digest streams to the outside.

When the user inputs a desired running time among the displayed running times, the running time is queried through the user input unit 2. The digest stream information display unit 12 determines a digest level of a digest stream corresponding to the queried running time, and outputs it to the decoder 3. The decoder 3 outputs digest segments with the digest level by decoding based on the digest level which is inputted from the digest stream level determining unit 1, upon receipt of a multimedia stream signal. The outputted digest segments are sequentially browsed, recorded, and edited by the browsing/recording/editing unit 4.

Taking example by Figure 4, if the digest level queried by the user is "1", the decoder 3 outputs digest segments of digest level "0" or "1" from the multimedia stream signal by decoding.

In this manner, only the digest level of a digest stream is inputted to the decoder 3, and the decoder 3 selects digest segments from the multimedia stream signal based on the digest level and outputs them to the

browsing/recording/editing unit 4.

Figure 7 is a schematic block diagram of an apparatus for generating multiple levels of digest stream for a multimedia content in accordance with another embodiment of the present invention. The apparatus as shown in Figure 7 provides a digest stream with a running time most close to the running time queried by the user. As illustrated in Figure 7, the apparatus in accordance with another embodiment of the present invention includes a digest stream level determining unit 5, an user input unit 2, decoder 3, and a browsing/recording/editing unit 4. The digest stream level determining unit 5 includes a digest segment information scheme analyzing unit 11 and a digest level determining unit 51. Herein, the digest segment information scheme analyzing unit 11, decoder 3, and browsing/recording/editing unit 4 are identical with those illustrated in Figure 6.

When the user inputs a desired running time by the user input unit 2, the digest level determining unit 51 outputs the digest level of a digest stream with a running time most close to the running time inputted by the user. That is, the digest level determining unit 51 compares the running time queried by the user with the running time of a digest stream of each multiple level digest stream, selects a running time $R(H_k)$ which is most close to the queried running time, and outputs a digest level(k) of the digest stream with the selected running time $R(H_k)$ to the decoder 3. In Figure 5, the running time queried by the user is marked by a thick line. The running time corresponding to the digest level(k) is slightly longer than the queried running time, and the running time of a digest stream corresponding to a digest level(k-1) is slightly shorter than the queried running time.

The decoder 3 receives the multimedia stream signal, and outputs digest

segments of a digest level lower than k or $k-1$, based on the digest level(k or $k-1$).
The outputted digest segments are sequentially browsed, recorded and edited by the browsing/recording/editing unit 4.

Meanwhile, the embodiments of the present invention described above, in
5 detail, the user input unit 2 as illustrated in Figures 6 and 7 is described by taking
an operation of querying a running time of a digest stream for example, for the
convenience of explanation. However, the user can queries other conditions
besides a running time, the user input unit 2 can receive the conditions from the
user, and the apparatus in accordance with the present invention provides a digest
10 stream according to various conditions inputted by the user, which will be
described below.

When the user inputs various conditions, for example, an occurrence of
events, persons, backgrounds, objects, and some kinds of situation information,
the digest stream level determining unit 5 constructs a digest stream based on the
15 conditions, for example, occurrence of a events, appearance of persons,
backgrounds, objects, and some kinds of situation information. The various
conditions queried by the user are, for example, as follows:

Digest "Titanic" movie to 10 minutes focusing on "Leonardo Dicaprio".

Digest "Titanic" movie to 10 minutes focusing on sinking scene.

20 Digest a music to 100 seconds focusing on piano.

According to these queries from the user, the digest stream level
determining unit 5 construct a digest stream based on a running time and various
query conditions or filtering conditions. By lowering or raising the digest level of
each digest segment, a digest stream is constructed. For instance, although a
25 digest segment has a low digest level(with a digest level value close to n), the

digest segment is considered as a digest segment with a little higher digest level for thereby constructing a digest stream if it corresponds to a query condition(e.g., "sinking scene"). Occurrence of events, appearance of persons, backgrounds, objects, and some kinds of situation information mentioned above are information generally contained in a content-based data area of a multimedia stream.

Meanwhile, there is a need for rapidly accessing only the running time information of a possible digest stream for the convenience of applications. For this purpose, a digest level running time information or a digest stream running time information can be added to a primary digest segment information scheme as shown in Figure 2 or Figure 3. Herein, the digest level running time information is information about the sum of the running times of digest segments of the same digest level is described according to digest levels, and the running time information of the digest stream is the running time information of a possible digest stream.

Such running time information can be described using an extra data structure, for example, in the case of a multiple level digest segment information scheme as shown in Figure 2. In the case of a multiple level digest segment information scheme as shown in Figure 3, the running time information can be described in each digest level header, or described using other data structure.

The above-described digest level running time information or digest stream running time information can be used for a rapid running time computation and for a parity check for a damaged data.

The parity check is possible by comparing the total running time of digest segments of the same digest level with the digest level running time of that digest level, and also by comparing the total running time of digest segments

corresponding to a digest level lower than a particular digest level with the digest stream running time of that digest level. More specifically, if the total running time of the digest segments of the same digest level and the digest level running time of that digest level are equivalent each other, it is determined that there is no data damage, and if the two running times are different, it is determined that there is a data damage. In addition, the total running time of digest segments having a digest level lower than a particular digest level and the digest stream running time corresponding to that digest level are equivalent each other, it is determined that there is no data damage, and if the two running times are different, it is determined that there is a data damage.

Meanwhile, in the case that only the information about a possible digest is queried by a digest stream browser, the corresponding information can be displayed by accessing only the digest level running time information or the digest stream running time information. In the case that the user determines a digest level from the information, a digest stream can be generated by accessing only the actual digest segment.

In this way, the digest level running time information and digest stream running time information additionally described in the multiple level digest segment information can be utilized for a rapid digest stream information transmission and for a parity check for determining whether or not there is a data damage.

As described above in detail, in the present invention, a multiple level digest segment information scheme is stored in the content-based segment information scheme of an original stream, and an importance level (i.e., digest level) of a digest level information, a time range information, etc. is given to a digest segment of the multiple level digest segment information scheme, whereby the amount of storage

for storing a digest stream is greatly decreased and it takes a very little time to encode each digest stream.

Moreover, by dynamically generating a digest stream using a digest segment information scheme during an execution of an application, it is unnecessary to edit a digest stream and encode an actual data so as to provide a multiple level digest stream. Therefore, it is possible to dynamically provide a digest stream corresponding to the dynamically changing level of user's need for a digest stream while the amount of data is not increased largely. Also, a user can browse a digest stream of a desired level for a desired time by using a multiple level digest stream provided.

In addition, although it is explained above that a digest stream of a multimedia stream is provided for an user in a multimedia server system, the user can also understand the overall story and/or the structure of a multimedia content and, he or she can find and move to desired position fast by accessing the digest stream when he or she has a CD(compact disc) for the content.

What is claimed is:

1. A method of describing a multiple level digest segment information scheme for multimedia contents in order to provide multiple levels of digest streams for each multimedia content with small amount of additional storage in accordance with an embodiment comprising the steps of:

describing the level information of digest segments by multiple levels in the content-based data area of the multimedia stream;

describing the digest level information and the time range information of each digest segment in a digest segment information structure; and

describing digest segment information scheme with a set of digest segment information structures.

2. The method of claim 1, wherein the time range information is the start point and end point of or the start point and duration of the digest segment.

3. The method of claim 1, wherein a digest level running time information or a digest stream running time information is added to the digest segment information scheme, in which the digest level running time information is information about the sum of the running time of digest segment information structures of the same digest level is described according to digest levels, and the running time information of the digest stream is a running time information of a possible digest streams.

4. A method of describing a multiple level digest segment information

scheme for multimedia contents in order to provide multiple levels of digest streams for each multimedia content with small amount of additional storage in accordance with an embodiment in accordance with a second embodiment of the present invention comprising the steps of:

5 describing the digest level information of digest segments to digest level headers by multiple levels in the content-based data area of a multimedia stream;

 describing the time range information of the digest segments in a digest segment information structure; and

10 describing a digest stream information scheme with a set of digest level headers, each of which has a set of digest segment information structures with the same digest level.

5. The method of claim 4, wherein the time range information is the start point and end point or the start point and duration of the digest segment.

15 6. The method of claim 4, wherein a digest level running time information or a digest stream running time information is added to the digest segment information scheme, in which the digest level running time information is information about the sum of running time of digest segment information structures
20 of the same digest level is described according to digest levels, and the running time information of the digest stream is a running time information of a possible digest streams.

7. The method of claim 4, wherein the digest level headers can be
25 arranged with the order of importance(level) in order to construct a digest stream

from multi level digest segment information scheme fast.

8. The method of claim 4, wherein the digest level segment information

5 structures can be arranged with the order of their time range information in order to construct a digest stream from multi level digest segment information scheme fast

9. A method of generating multiple levels of digest streams for
10 multimedia contents in accordance with the present invention comprising the steps of:

detecting the digest level and time range information of the digest segment information structures from the multiple level digest stream information scheme contained in the content-based data area of the multimedia stream; and/or

15 detecting the additional information about each digest segment information structure such as occurrence of events, appearance of persons, objects, backgrounds, and situation information of events, persons, objects, backgrounds contained in the content-based data area of the multimedia stream; and

when a condition is queried by the user, generating a multiple level digest
20 stream by arranging the digest segments with a priority of more than a certain level corresponding to the condition in a time sequence.

10. The method of claim 9, wherein a digest level running time information or a digest stream running time information can be used to find the
25 matched level of digest stream with a user's input fast where the digest level

running time information is information about the sum of running time of digest segment information structures of the same digest level is described according to digest levels, and the running time information of the digest stream is a running time information of a possible digest streams.

5

11. The method of claim 10, wherein a parity check is performed by comparing the total running time of the plurality of digest segments of the same digest level with the digest level running time of that digest level.

10

12. The method of claim 10, wherein a parity check is performed by comparing the total running time of digest segment information structures having a digest level less than or equal to a particular level among the plurality of digest segments with the digest stream running time of that digest level.

15

13. An apparatus for generating a multiple level digest stream of a multimedia stream comprising:

a user input unit;

a digest stream level determining unit for determining and outputting a digest level of a digest stream corresponding to a condition queried by the user input unit, upon receipt of a multimedia stream signal; and

20

a decoder for decoding digest segments of the above digest level from the multimedia stream signal.

25

14. The method of claim 11, wherein the condition is the running time of a digest stream.

15. The method of claim 13, wherein the condition is one of a time constraint of digest stream, a level information of digest stream, an occurrence of an event, an appearance of a person, a background, an object, situation information about of event, person, object, background.

16. The method of claim 13, wherein the condition is combination of a time constraint of digest stream, a level information of digest stream, occurrence of events, appearance of persons, backgrounds, objects, situation information about of events, persons, objects, backgrounds.

17. The method of claim 13, wherein a digest level information and a time range information, and/or the information of the sum of the running time of each digest segment are contained in the digest level.

18. The method of claim 17, wherein the time range information the start point and end point or the start point and duration of the digest segment.

19. The method of claim 13, wherein the digest stream level determining unit comprises:

a multiple level digest segment information scheme analyzing unit for computing the running time of each digest stream, by analyzing a multiple level digest segment information scheme contained in the content-based data of the multimedia stream signal; and

a digest stream information display unit for selecting and querying a running time of a plurality of running times by the user, by displaying the running times by

computed digest stream.

20. The method of claim 13, wherein the digest stream level determining unit comprises:

5 a multiple level digest segment information scheme analyzing unit for computing the running time of each digest stream, by analyzing a multiple level digest segment information scheme contained in the content-based data of the multimedia stream signal; and

10 a digest level determining unit for outputting a digest level of a digest stream corresponding to a running time most close to the queried running time, upon receipt of the above running time.

21. The method of claim 20, wherein the digest level determining unit compares the running time queried by the user with the running time and/or
15 additional information such as occurrence of events, appearance of persons, backgrounds, objects, situation information about of events, persons, objects, backgrounds of digest stream and digest segment information structures, selects a running time most close to the queried running time, and outputs a digest level of the digest stream with the selected running time and/or additional information such
20 as occurrence of events, appearance of persons, backgrounds, objects, situation information about of events, persons, objects to the decoder.

ABSTRACT OF THE DISCLOSURE

The present invention is intended to provide multiple levels of digest streams for multimedia contents with small amount of additional storage using a multiple level digest segment information scheme. In the present invention, a multiple level digest segment information is contained in the content-based data area of the multimedia content by representing a level information of each digest segment by multiple levels in a content-based data area of a multimedia content, describing the digest level of the digest segment and the time range information of the digest segment in the digest segment information scheme, and outputting digest segments whose digest level is less than or equal to requested digest level by decoding, upon receipt of the digest level of the digest segment.

FIG. 1

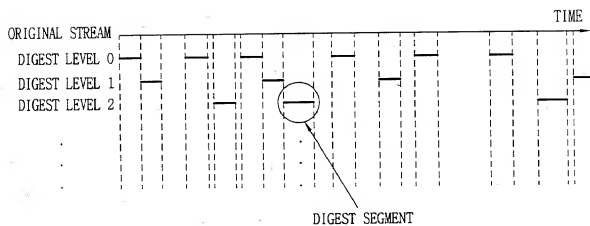


FIG. 2

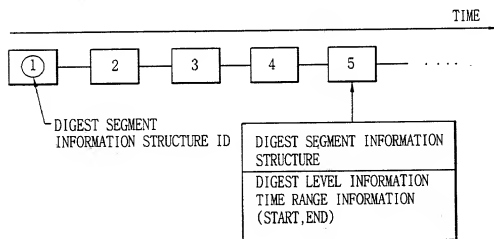


FIG. 3

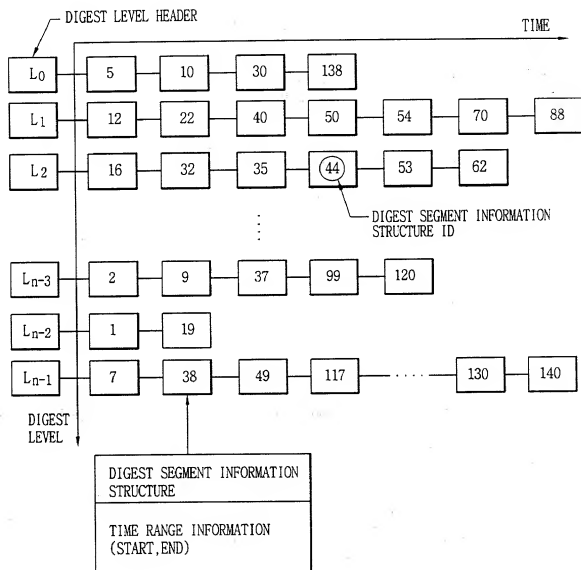


FIG. 4

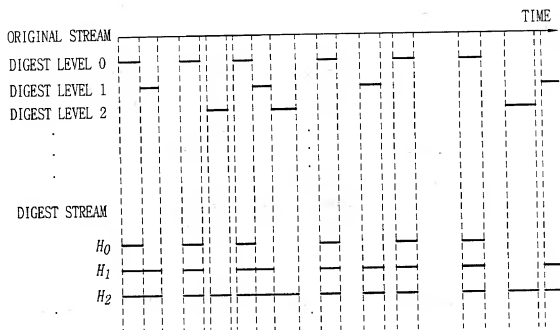


FIG.5

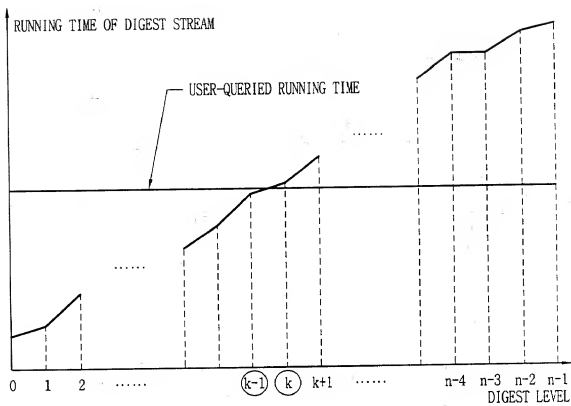


FIG. 6


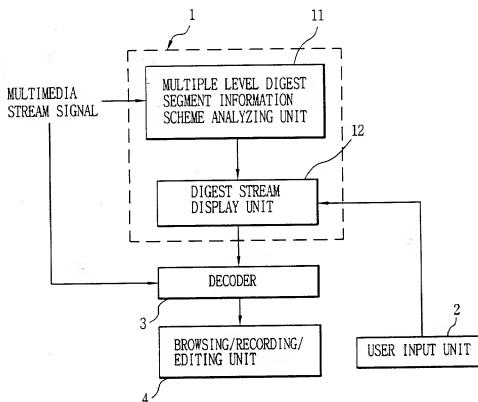


FIG. 7

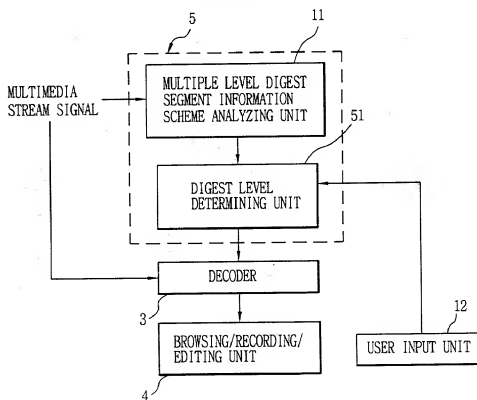

Docket No.: _____

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled METHOD OF DESCRIBING MULTIPLE LEVEL DIGEST SEGMENT INFORMATION SCHEME FOR MULTIMEDIA CONTENTS AND APPARATUS FOR GENERATING DIGEST STREAM FROM DESCRIBED MULTIPLE LEVEL DIGEST SEGMENT INFORMATION SCHEME AND METHOD THEREOF, the specification of which

☒ is attached hereto ☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365 (b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s):

Number

Country

Foreign Filing Date

Month/Day/Year

01/15/1999

Korea

01/30/1999

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s):

Filing Date (Month/Day/Year)

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

**Prior U. S. Application
or PCT Parent Number**

Filing Date (Month/Day/Year)

Parent Patent Number (if applicable)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Carl R. Wesolowski, Registration No. 40,372; John C. Eisenhart, Registration No. 38,128; Rene A. Vazquez, Registration No. 38,647; Michael J. Cornelison, Registration No. 40,395; and Stuart I. Smith, Registration No. 42,159; and Carol L. Druzbeck, Registration No. 40,287, all of

FLESHNER & KIM
P. O. Box 221200
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Sung-Bae JUN

Inventor's signature: *SL LB BL*

Date: 2000. 1. 14

Residence: Seoul, Korea

Citizenship: Republic of Korea

Post Office Address: 804, Sihung 4-Dong, Kumchun-Ku, Seoul, Korea

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Docket No.: